

PB



### Construction


Single inlet, direct or belt driven centrifugal fan with casing in welded steel sheet. Impeller with straight self-cleaning radial blades in steel sheet, suitable for air with solid particles. Casing and impeller in other materials for example stainless steel or galvanized steel sheet may be supplied on request.

### Motor

380/420V, 50Hz three-phase asynchronous motor IEC34-1. Enclosure IP55, class F insulation. Special voltage or frequency, or enclosure may be supplied on request. Wiring diagram, see page 179.

### Accessories

Inlet and outlet fittings, silencer, sleeve.

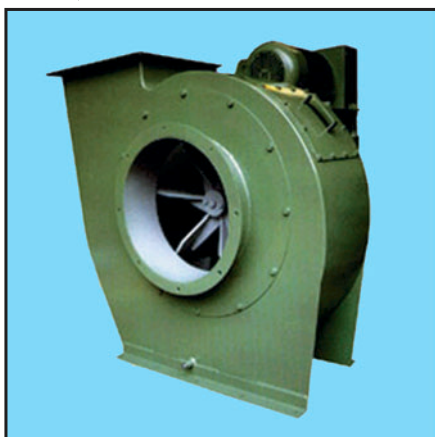

PH



| Type | Flow<br>m <sup>3</sup> /s | Pressure<br>kPa |
|------|---------------------------|-----------------|
| PB1  | 0,1-12                    | 4               |
| PB2  | 0,2-24                    | 3               |
| PB3  | 0,3-25                    | 2               |
| PH1  | 0,2-25                    | 20              |
| PH2  | 0,4-40                    | 20              |

